

Name of Driver		Date	Track		Engine	Plug	Muffler	
Renaud Savoya		01/08/22	ARCF42 Boisset		Picco P3TT	OS P4	EFRA 2166	
			Condition: Dry	Temperature: 35°C				
Spur Gear	Clutch Bell	Clutch Spring	Clutch Shoe	Tire	Tire Insert	Wheel	Body	Fuel
46 T	☐ Std. ☒ LW 13 T	☐ 0.90 ☐ 1.00 ☒ 0.95 ☐ 1.10	Carbon ☒ Aluminum ☒ 3	Tire : Zipp's Compounds: MLW	AKA	AKA	TKI2	Hot Road GT

Diff. Gear Set-Up

IFW136

	Front	Center	Rear
Diff. Gear	☒ 10/20 ☐ 12/18 ☐ LSD	☒ 10/20 ☐ 12/18 ☐ LSD	☒ 10/20 ☐ 12/18 ☐ LSD
Ring Gear	☒ 43/13 ☐ 42/12	Diff. Size ☒ Small ☐ Large	Ring Gear ☒ 43/13 ☐ 42/12
	7k #	10k #	5k #

Shock Set-Up

	Front	Rear
Shock Type	P : w/Diaphragm A : Aeration	Size type 50 - A
Shock Piston	B : Black W : White T : Taper	Size type 58 - A
Shock Oil	# 800	# 700
Shock Spring	Dark blue 70mm	Dark blue 81mm

Ride Height

Front	Rear
23 mm	27 mm

Rebound

Front	Rear
105 mm	122,5 mm

Camber Angle

Front	Rear
+ 2 °	+ 3 °


Toe Angle

Front	Rear
+ 2 °	☒ 2.5° ☐ 3° ☐ 3.5°

Wheelbase


Collar of Rear Hub	Front Side 5 mm Rear Side 0 mm
--------------------	-----------------------------------

Shock Mount Position



Sus. Arm	Front ☐ In ☐ Out Rear ☐ In ☒ Out
----------	--

Rear Upper Arm Position



Rear Wheel Hub

☒ Narrow ☐ Std. ☐ Wide
--

Shock Stay

Front	☐ Short ☒ Long ☒ Alu ☐ Carbon
Rear	☐ Short ☒ Long ☒ Alu ☐ Carbon

Shock Bush

Front	☐ Short ☒ Std.
Rear	☐ Short ☐ Std. ☒ Long

☐ Plastic ☒ Aluminum
--

Hub Carrier Bush	☒ Plastic ☐ Brass
------------------	---

☒ Narrow ☐ Std. ☐ Wide
--


Front Sus. Arm

☐ SS ☒ Soft (Std.) ☐ Hard

Front Sus. Bush

Rear Side	☐ ☒
-----------	--

Front Upper Arm Position




Front Wheel Hub

☒ Narrow ☐ Std. ☐ Wide
--

Front Hub Carrier

☐ Plastic ☒ Aluminum
☐ 13° ☒ 16° ☐ 17.5° ☐ 19° ☐ 22°

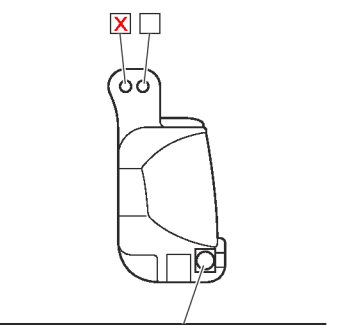

Rear Sus. Bush

Front Side	☒ ☐ ☐ ☐
Rear Side	☒ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Rear Sus. Arm


☐ Soft (Std.)	☒ Hard
Rear Sus. Bush	
☐ Short	☐
☐ Medium	☐
☒ Long	☐

A technical line drawing of a rear suspension bush. It features a long, cylindrical shank on the right side, which tapers slightly towards a larger, flanged end on the left. The flange has a circular center with a smaller hole, surrounded by a wider ring. The drawing is a side view, showing the profile of the component.

Servo Horn

Steering	Throttle
☐ Plastic ☐ AL. Long ☒ AL. Short	☐ Plastic ☒ AL.

Steering Plate



Sway Bar

Front	Rear
φ 2,7mm 1 mm	φ 2,6mm 2 mm

Weight

Front	Rear
☐ None ☐ IFW604-10 ☒ IFW604-20 ☐ other	☐ None ☐ IFW605-10 ☒ IFW605-20 ☐ other

Wing

☒ IF491(TK14)	Flap ☒ None ☐ 5mm ☐ 8mm ☒ Holes
---	--

memo:

- OPTIONS:**
- titanium screws and turnbuckles
 - IFW426 aluminium AMB Plate
 - IFW626 carbon servo saver plate
 - IFW628 carbon radio plate
 - rear hub position and hexes for legal width on AKA wheels (EFRA)
 - IFW613 cva front and rear driveshafts
 - MA081, IFW617 and IFW616 center dogbones