

Inferno III P10 TK12 SETUP SHEET

ver.1.03 **KYOSHO**
THE FIRST RADIO CONTROL MODELS

Name of Driver Reno Savoya		Date 10/09/2022	Track RC Redovan Worlds		Engine <i>Picco P3TT Limited</i>	Plug OS P4	Muffler EFRA 2166	
Spur Gear 46 T		Clutch Bell ☒ Std. 13 T	Clutch Spring ☒ 0.90 ☐ 1.00 ☒ 0.95 ☐ 1.10	Clutch Shoe Carbon ☒ x Aluminum ☒ 3x	Tire Tire: AKA Double down Compounds: MLW	Tire Insert AKA	Wheel AKA	Body TK12 light Racing experience 25% GT

● Diff. Gear Set-Up

	Front	Center	Rear
Diff. Gear	☒ 10/20 ☐ 12/18 ☐ LSD ☒ Ring Gear 7k ☒ 43/13 ☐ 42/12	☒ 10/20 ☐ 12/18 ☐ LSD ☒ Diff. Size 10k ☒ Small ☐ Large	☒ 10/20 ☐ 12/18 ☐ LSD ☒ Ring Gear 7k ☐ 43/13 ☐ 42/12

● Shock Set-Up

	Front	Rear
Shock Type	P : w/Diaphragm A : Aeration 50 - A	58 - A
Shock Piston	B : Black W : White T : Taper 1,2B x 8	1,3W x 8
Shock Oil	# 850	# 800
Shock Spring	IFS001-715	<i>Prototype black 1,6mm wire</i>

● Ride Height

Front	Rear
22mm	26mm

● Rebound

Front	Rear
105mm	122,5mm

● Camber Angle

Front	Rear
+ -2°	+ -3°

● Toe Angle

Front	Rear
+ -2°	☒ 2.5° ☐ 3° ☐ 3.5°

● Wheelbase

Collar of Rear Hub	Front Side 5mm Rear Side 0mm
--------------------	---

● Shock Mount Position

<Front>	<Rear>
Sus. Arm	
Front	☐ In ☒ Out
Rear	☐ In ☒ Out

● Rear Upper Arm Position

	☐ Plastic ☒ Aluminum
	Hub Carrier Bush ☒ Plastic ☐ Brass
☒ Narrow ☐ Std. ☐ Wide	


● Front Sus. Arm

☐ SS ☒ Soft (Std.) ☐ Hard

● Front Sus. Bush

Rear Side	
-----------	--

● Front Upper Arm Position




● Front Wheel Hub

☒ Narrow ☐ Std. ☐ Wide
--

● Front Hub Carrier

☐ Plastic ☒ Aluminum
☐ 13° ☒ 16° ☐ 17.5° ☐ 19° ☐ 22°

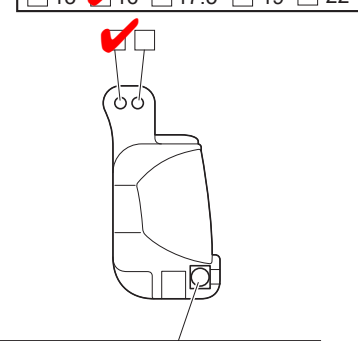

● Rear Sus. Bush

Front Side	
Rear Side	


● Rear Sus. Arm

☐ Soft (Std.) ☒ Hard
Rear Sus. Bush
Short
Medium
Long

● Servo Horn

Steering	Throttle
☐ Plastic ☐ AL. Long ☒ AL. Short	☐ Plastic ☒ AL.

● Steering Plate



● Sway Bar

Front	Rear
$\varnothing$ 2,4	$\varnothing$ 2,6
0mm	2mm

● Weight

Front	Rear
☐ None ☐ IFW604-10 ☒ IFW604-20 ☐ other	☐ None ☐ IFW605-10 ☒ IFW605-20 ☐ other

● Wing

☒ IF491(TK14)	Flap ☐ None ☐ 5mm ☐ 8mm ☒ Holes
---	---

OPTIONS:

- titanium screws and turnbuckles
- IFW426 aluminium AMB Plate
- IFW626 carbon servo saver plate
- IFW628 carbon radio plate
- rear hub position and hexes for legal width on AKA wheels (EFRA)
- IFW613 cva front and rear driveshafts
- MA081, IFW617 and IFW616 center dogbones