


Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Shock Position :




Toe: ☐ In ☐ Out _____°

Tie Rod: _____


Front Bulkhead Weight Placement:

- ☐ Plastic
☐ Aluminum
☐ Brass
- ☐ None
☐ Bulkhead Inside _____oz _____g
☐ On the skid plate _____oz _____g * 1oz=28g

Upper Rod Position :

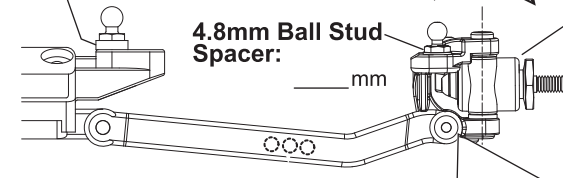

Caster:



☐ 25° ☐ 30°

Spacer: ☐ 0.5
☐ 1.0
☐ None

Caster Block: ☐ 0°
☐ 2°
☐ 4°

Caster Block Position: ☐ ☐

AL. Steering Support:

☐ None
☐ UMW724



4.8mm Ball Stud:

☐ UB046 (STD)
☐ UB048

Ackerman Steer Spacer:

_____ mm


Sway Bar: ☐ None
☐ _____ mm

Axle Height Spacer:

☐ _____ mm
☐ _____ mm

Bump Steer Spacer:


_____ mm




Wheelbase: F: _____ mm R: _____ mm

Rear Suspension

Shock Position :




Wing Stay Position :



Upper Spacer : _____ mm

Shock Position :



Upper Spacer : _____ mm


Hub. Spacer :

_____ mm

Drive Hub :

☐ 4mm
☐ 4.5mm
☐ 5.2mm
☐ 6.2mm (Std.)

Sus. Bush : Hub. Bush :



Sus Holder Spacer:

RF ☐ 0.5 ☐ 1.0 ☐ None
RR ☐ 0.5 ☐ 1.0 ☐ None

Lower Sus. Holder:



RF _____ ☐ IN ☐ OUT
RR _____ ☐ IN ☐ OUT

Anti-Squat: _____°

Camber: _____°

Sway Bar: ☐ None
☐ _____ mm

Wheelbase:

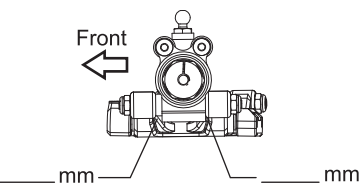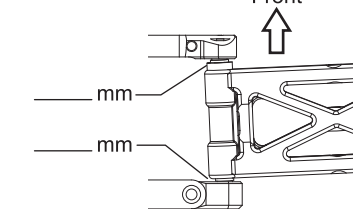

Differential


☐ Gear: _____
☐ Ball: _____

Shock



Front

Rear

Piston: _____
Oil: # _____ # _____
Spring: _____
Limiters: In _____ mm In _____ mm
Out _____ mm Out _____ mm
Length (A): _____ mm _____ mm
O-Ring: _____
Ball End Type: Front ☐ S ☐ M ☐ L
Rear ☐ S ☐ M ☐ L




Battery Placement:



Battery _____

Chassis

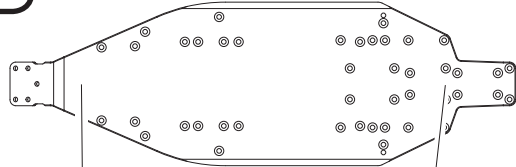


F _____ mm Ride Height: R _____ mm

Track Condition

- ☐ Smooth
☐ Bumpy
☐ Low Traction
☐ Med. Traction
☐ High Traction
☐ Wet
☐ Dry
- ☐ Sandy
☐ Soft Dirt
☐ Grass
☐ Blue Groove
☐ Clay
☐ Dusty
☐ _____

Wing

Cut Line



Arm0

Tire

Front

Rear

Tire _____
Insert _____
Wheel _____

Other

Motor: _____
ESC: _____
Ratio: _____